

# PSA0218L/1333

Spiral Antenna



## Key Features

Designed for Test & Measurement


Applications

Designed for DF Arrays


Pattern - Directional

Phase Matching Available


Amplitude Matching Available

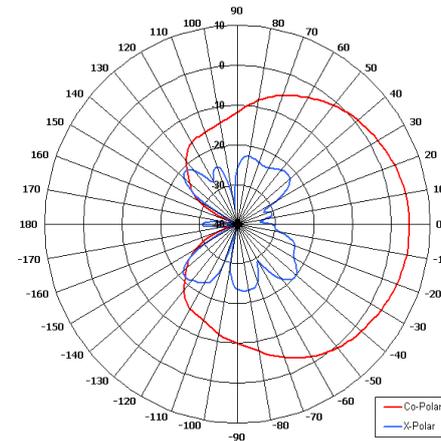

Azimuth Pattern

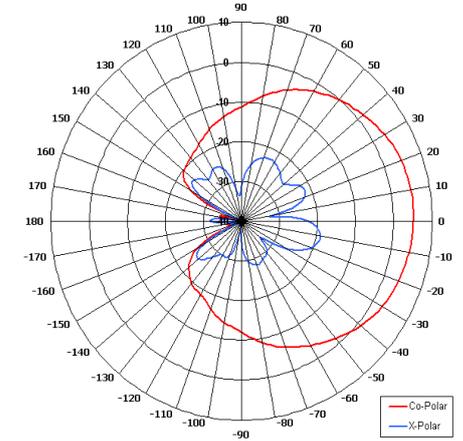

Elevation Pattern

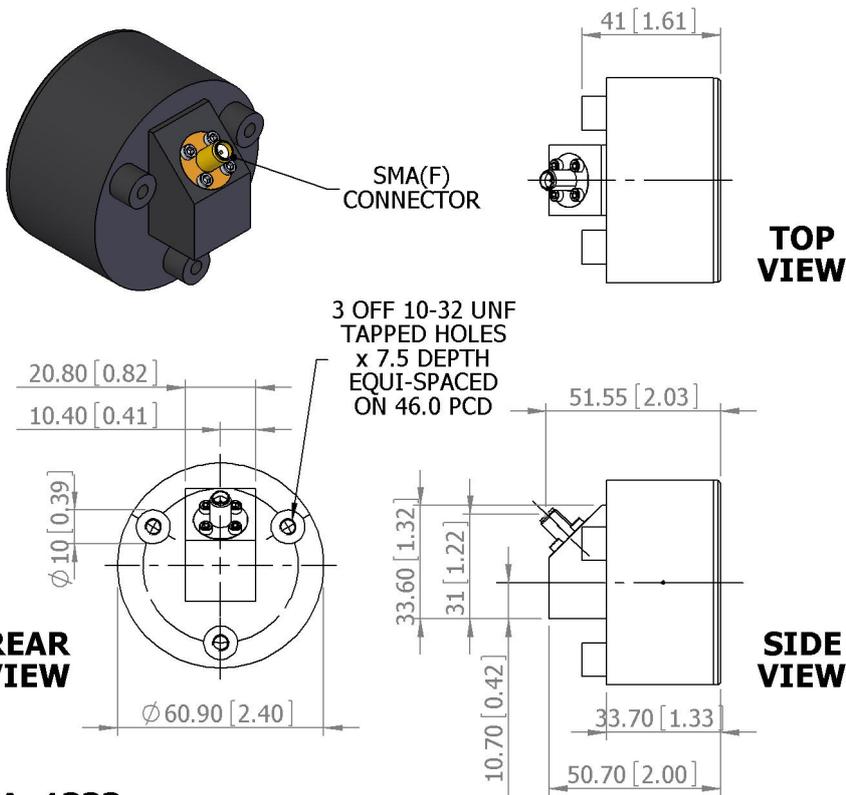

## ELECTRICAL

Frequency	2.00 - 18.00 GHz
Gain	> -4 dBiC (2-4 GHz) >2 dBiC (6-18 GHz)
Polarisation	Left Hand Circular
Beamwidth	3 dB 75°, 6 dB 110° Approx
Axial Ratio	3.5 boresight, 4 across HPBW worst case
VSWR	2:1 over 90% of band, 3:1 worst case
Power Rating	2-5 W varies across band
Beam Squint	6° Typ 10° Max

## MECHANICAL

Standard Finish	Black-27038 per Def-Std-595
Mass	85g (3.0 oz)
Temperature	-62° to +71°C
Wind Loading	N/A

## MOUNTING OPTIONS

Kits Available	N/A
----------------	-----

See separate data sheets

## ADDITIONAL NOTES

Issued 250210

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.  
©Chelton Limited

For further information please contact:

Chelton Limited,  
Lambda House, Cheveley,  
Newmarket, Suffolk CB8 9RG, UK.

T: +44 (0)1638 732 177

E: [newmarket.sales@chelton.com](mailto:newmarket.sales@chelton.com)

W: [www.chelton.com/microwave](http://www.chelton.com/microwave)